

AFINITICA® ACTIVE SPRAY

PRODUCT DESCRIPTION

Technology	Isopropanol Carrier
Appearance	Clear liquid
Viscosity (cP at Room temperature)	1
Flash point (°C)	13 (Flammable liquid)
On Part Life	Maximum 24h
Drying time	Approximately 30 s

AFINITICA® Active Spray is a surface preparation product which accelerates cyanoacrilates curing and is specially designed for curing AFINITICA® AF06 on Wood and plastic surfaces. Its long open time and short drying time make the product to be chosen by professionals and DIY enthusiasts. Unlike other accelerators, AFINITICA® Active Spray is non-toxic, so it is very suitable for domestic use. AFINITICA® Active Spray is also particularly suitable for promoting quick adhesion when joining parts are immediately subjected to high stress, like edge coating or gluing shoe soles.

TYPICAL CURING PERFORMANCE

AFINITICA® Active Spray accelerates curing process of cyanoacrylates by its application on the surface of any of the substrates to bond. After this, cyanoacrylate adhesive is applied in its regular way and curing process is started when both substrates are joined and pressed firmly. Strength develop instantly (80% of maximum strength) and maximum resistance is reached after 24 hours.

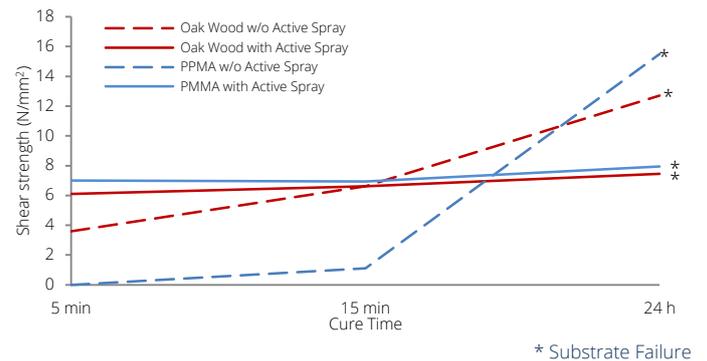
FIXTURE TIMES

Fixture time is the time at which an adhesive bond (250 mm²) is capable of supporting a 3 kg load for 10 seconds. The fixture time will depend on the substrate. The table below shows the fixture time for different substrates using lap shears.

	Time (s)	Time (s) with AFINITICA® Active Spray
Pine wood	10	≤5
Beech wood	10	≤5
Oak wood	130	≤5
ABS	10	≤5
Polycarbonate	15	10
PMMA	110	≤5

CURE SPEED vs. SUBSTRATE

The rate and strength of cure will depend on the substrate used. The graph below shows the tensile shear strength developed with time on different materials and tested according to ISO 4587.


TYPICAL PERFORMANCE OF CURED MATERIAL
TENSILE SHEAR STRENGTH

The shear strength will depend on the substrate. The Table below shows the shear strength for different substrates using lap shears according to ISO 4587.

Cured for 24h at 22 °C

	Strength (N/mm ²)
Pine wood	7 – 9*
Beech wood	11 – 14*
Oak wood	6 – 9*
ABS	9 – 10*
Polycarbonate	7 – 11*
PMMA	7 – 10*

* Substrate Failure

GENERAL INFORMATION

This product is not recommended for use in pure oxygen and/or oxygen rich systems and should not be selected as a sealant for chlorine or other strong oxidizing materials. For safe handling information on this product, consult the Safety Data Sheet (SDS): SDS242909

Directions for use:

1) AFINITICA® Active Spray can be used to clean and prepare non-metallic substrates such as plastics, leather, wood, ceramics... for faster assembly. The product should not be used on metallic substrates that do not need activation.

2) Spray at least over one of the surfaces to bond from a distance of approximately 20 cm and let it dry for 15-30 s.

3) Apply AFINITICA® AF06 on one of the two surfaces (if a long Open Time is required do it over a non-sprayed surface). For an irregular surface more material may be required to fill all irregular gaps.

4) After bringing the second surface into contact, handling strength will be reached instantaneously. AFINITICA® Active Spray is especially suitable to promote rapid adhesion when parts to be bonded are placed under immediate high strain.

5) Store bottle upright in a cool and dry environment.

6) Product shelf-life: 12 months.

may be covered by one or more United States or foreign patents or patent applications.

Conversions:

$(^{\circ}\text{C} \times 1.8) + 32 = ^{\circ}\text{F}$

$\text{kV/mm} \times 25.4 = \text{V/mil}$

$\text{mm} / 25.4 = \text{in}$

$\mu\text{m} / 25.4 = \text{mil}$

$\text{N} \times 0.225 = \text{lb}$

$\text{N/mm} \times 5.71 = \text{lb/in}$

$\text{N/mm}^2 \times 145 = \text{psi}$

$\text{MPa} \times 145 = \text{psi}$

$\text{N}\cdot\text{m} \times 8.851 = \text{lb}\cdot\text{in}$

$\text{N}\cdot\text{mm} \times 0.142 = \text{oz}\cdot\text{in}$

$\text{mPa}\cdot\text{s} = \text{cP}$

NOTE

The data contained herein are furnished for information only and are believed to be reliable. AFINITICA cannot assume responsibility for the results obtained by others over whose methods we have no control. It is the user's responsibility to determine suitability for the user's purpose of any production methods mentioned herein and to adopt such precautions as may be advisable for the protection of property and of persons against any hazards that may be involved in the handling and use thereof. In light of the foregoing, AFINITICA Technologies s.l. specifically disclaims all warranties expressed or implied, including warranties of merchantability or fitness for a particular purpose, arising from sale or use of AFINITICA's products. AFINITICA specifically disclaims any liability for consequential or incidental damages of any kind, including lost profits. The discussion herein of various processes or compositions is not to be interpreted as representation that they are free from domination of patents owned by others or as a license under any AFINITICA Technologies patents that may cover such processes or compositions. We recommend that each prospective user test his proposed application before repetitive use, using this data as a guide. This product